


glenngraphics

COPYRIGHT

LADDER SAFETY

FOR BIG AND SMALL JOBS.

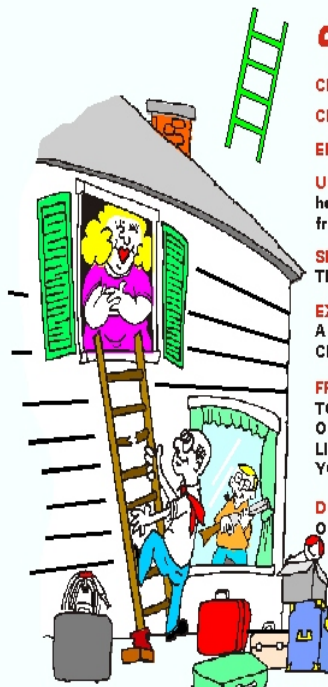

COMMON SAFETY PRACTICES:

- CHOOSE THE RIGHT LADDER.**
- CHECK CONDITION OF LADDER BEFORE USE.**
- ENGAGE ALL LADDER LOCKS.**
- USE 4-TO-1 RULE** (for every 4 feet of ladder height, position the ladder's base 1 foot away from the vertical support).
- SECURE** (tie off) **THE LADDER AS CLOSE TO THE TOP AS YOU CAN.**
- EXTEND THE LADDER AT LEAST 3 FEET ABOVE THE SUPPORTING EDGE WHEN CLIMBING ONTO A ROOF OR PLATFORM.**
- FREE HANDS WHEN CLIMBING.** CARRY TOOLS, PARTS, ETC., IN AN APRON OR BELT OR RAISE AND LOWER THEM BY A HAND LINE. HOOK EQUIPMENT ON A RUNG WHILE YOU WORK.
- DO NOT LEAN OR STRETCH TO REACH YOUR OBJECT WORK AREA. MOVE THE LADDER.**

SAMPLE

ORDER GG#77

PARTNERS IN SAFETY AND LOSS CONTROL
STEP UP TO SAFETY... USE A LADDER!

glenngraphics

COPYRIGHT